



**Ratings Range**

		KD275U 60 Hz	KD300 50 Hz
Standby:	kW	275	242
	kVA	344	303
Prime:	kW	250	220
	kVA	313	275

**Standard Features**

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- A one-year limited warranty covers all systems and components.
- John Deere engine with 12-volt battery charging alternator.
- Leroy Somer single-bearing alternator with insulation class H.
- Unit-mounted radiator with 50°C (122°F) ambient air capability.
- Skid and vibration isolators.
- Subbase fuel tank, 390 L (103 gal.).
- Dry type air filter.
- Main line circuit breaker.
- Microprocessor controller.
- Battery, battery rack, and cables.
- Industrial 9 dB(A) reduction exhaust silencer (loose).
- Operation and installation literature.

**Generator Set Ratings**

Alternator	Voltage	Ph	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
	120/208	3	60	275/344	955	250/313	870
	127/220	3	60	275/344	903	250/313	822
	115/230	3	60	275/344	864	250/313	787
	120/240	3	60	275/344	828	250/313	754
	220/380	3	60	275/344	523	250/313	476
	254/440	3	60	275/344	451	250/313	411
	277/480	3	60	275/344	414	250/313	377
LSA462L9	347/600	3	60	275/344	331	250/313	302
	115/200	3	50	242/303	875	220/275	794
	110/220	3	50	242/303	795	220/275	722
	115/230	3	50	242/303	761	220/275	690
	120/240	3	50	242/303	729	220/275	662
	220/380	3	50	242/303	460	220/275	418
	230/400	3	50	242/303	437	220/275	397
	240/415	3	50	242/303	422	220/275	383



**With Available Enclosure Accessory**

**RATINGS:** All three-phase units are rated at 0.8 power factor. See TIB-109 for generator set derate tables. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.  
**PRP:** Prime power is available for an unlimited number of annual operating hours in variable load applications in accordance with ISO-8528/1.  
 A 10% overload capability is available for a period of 1 hour within a 12-hour period of operating in accordance with ISO-3046/1.  
**ESP:** The emergency standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO-8528/1. Overload is not allowed.  
 The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

# Alternator Specifications

- NEMA-MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards compliance for temperature rise and motor starting.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

Specifications	60 Hz	50 Hz
Ratings voltage	480 V	400 V
Standby rating @ 27°C, kVA	375	300
Prime rating @ 40°C, kVA	343	280
Efficiency @ full load, %	93.2	93
Air flow, m <sup>3</sup> /min. (cfm)	30.6 (1081)	25.8 (911)
Direct axis subtransient reactance (X <sup>"d</sup> ), %	8.0	8.1

Specifications	Alternator
Manufacturer	Leroy Somer
Type	4-Pole, Rotating-Field
Exciter type	Shunt
Leads: quantity, type	12, Reconnectable
Voltage regulator	Solid State, R230
Insulation:	NEMA MG1
Material	Class H
Bearing: quantity, type	1, Sealed
Coupling	Direct
Voltage regulation, no-load to full-load	±1%

## Application Data

### Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	John Deere	
Engine model	6081HF070-318	6081HF001
Engine type	4-Cycle, Turbocharged, Aftercooled	
Cylinder arrangement	6 Inline	
Displacement, L (cu. in.)	8.1 (494)	
Bore and stroke, mm (in.)	116 x 129 (4.6 x 5.1)	
Compression ratio	15.7:1	
Piston speed, m/min. (ft./min.)	464 (1524)	387 (1266)
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	308 (413)	261 (349.7)
Valve material:		
Intake	Chromium-Silicon Steel	
Exhaust	Stainless Steel	
Governor type	Isochronous	Mechanical
Frequency regulation, no-load to full-load	ISO 5%	
Frequency regulation, steady state	±0.5%	±2.5%
Air cleaner type, all models	Dry	

### Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m <sup>3</sup> /min. (cfm)	57.2 (2019)	44.4 (1568)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	448 (838)	640 (1184)
Maximum allowable back pressure, kPa (in. Hg)	7.5 (2.2)	
Exhaust outlet size at engine hookup, mm (in.)	100 (3.94)	

### Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Battery charging alternator:	12 Volt	
Ground (negative/positive)	Negative	
Volts (DC)	12	
Starter motor rated voltage (DC)	12	
Battery, recommended cold cranking amps (CCA):		
Quantity, CCA rating each	One, 1000	
Battery voltage (DC)	12	

### Fuel

Fuel System	60 Hz	50 Hz
Max. fuel flow, Lph (gph)	316 (83.5)	203 (53.6)
Fuel prime pump	Manual	
Recommended fuel	#2 Diesel	
Fuel tank capacity, L (gal.)	390 (103)	

### Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	31.0 (32.8)	
Oil pan capacity with filter, L (qt.)	32.0 (33.8)	

### Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)	50 (122)	
Radiator system capacity, including engine, L (gal.)	40 (10.6)	
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	—	
Water pump type	Centrifugal	
Fan, kWm (HP)	10.0 (13.4)	7.0 (9.4)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.2 (0.8)	

# Application Data

## Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m <sup>3</sup> /min. (scfm) *	420 (14834)	330 (11655)
Combustion air, m <sup>3</sup> /min. (cfm)	57.2 (2019)	18.2 (642)

\* Air density = 1.20 kg/m<sup>3</sup> (0.075 lbm/ft<sup>3</sup>)

Fuel Consumption	60 Hz	50 Hz
<b>Diesel, Lph (gph) at % load</b>	<b>Standby Rating</b>	
110% (of the standby rating)	74.0 (19.6)	68.0 (18.0)
<b>Diesel, Lph (gph) at % load</b>	<b>Prime Rating</b>	
100% (of the prime rating)	63.6 (16.8)	56.9 (15.0)
75% (of the prime rating)	47.4 (12.5)	42.6 (11.3)
50% (of the prime rating)	32.8 (8.7)	29.4 (7.8)

## Controllers



### Decision-Maker™ 1000

#### Automation

- Test LEDs
- Voltage and speed stabilization

#### Engine Parameters

- Engine speed indication (with LCD message)
- Battery voltage indication (with LCD message)
- Elapsed hour meter (with LCD message)
- Fuel solenoid control
- Starter control

#### Measurements

- Frequency, Hz (with LCD message)

#### Operation and/or Safety Lights

- Oil pressure fault
- Water temperature fault
- Fail to start fault
- Overspeed fault ( $\geq 60$  kVA)
- Set ready for load
- Charging alternator fault
- General alarm
- General fault
- Panel lamp
- Emergency stop fault

#### Safety Devices

- Overspeed fault
- Automatic standby

#### Miscellaneous

- Fault reset
- Three-phase with or without neutral, two-phase, or single-phase use



### Decision-Maker™ 4000

#### Standard Features

- Large LCD display panel
- Unique control wheel for system access
- User buttons for start, stop, menu, and escape
- Emergency stop button
- On/off key switch
- Panel-mounted battery fuse
- Panel-mounted USB ports for PC access and software upgrades
- Password-protected access to control parameters
- Upgradeable software for future enhancements
- Easy upgrade from Decision-Maker™ 1000

#### LCD Panel Features

- 600 x 800 resolution
- Multiple lines of text or graphic display
- Icons for quick identification of system status
- Five languages: English, French, German, Portuguese, and Spanish

#### Communication Features

- Engine communication via CANbus
- Modbus communication via RS-485 or ethernet
- PC and flash drive connections via USB

#### Functions

- View and adjust system operation parameters
- View system faults

#### Viewable/Selectable Parameters (may require optional module)

- Voltage: phase-to-neutral, total voltage
- Current
- Frequency
- Power (active/reactive/apparent)
- Power factor
- Engine speed
- Oil pressure
- Coolant temperature
- Battery voltage
- Fuel level (%)
- Time delays

#### Viewable Faults (over 60 individual faults are monitored) including:

- Alternator protection (if equipped)
- Circuit breaker and ground fault protection
- Communication and engine ECM monitoring
- Cooling air monitoring
- Electrical charging system
- Engine cooling system
- Engine lube system
- Fuel system
- Generator set status

## Available Accessories

### Enclosed Unit

- Sound Enclosure M227, 60 Hz, 71.3 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)
- Sound Enclosure M227, 50 Hz, 69.5 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)

### Open Unit

- Exhaust Silencer, Critical 40 dB(A) Reduction
- Exhaust Silencer, Residential 29 dB(A) Reduction
- Extension, 40 cm (16 in.)
- Flexible Exhaust Connector
- Protection Mesh

### Cooling System

- Block Heater [recommended for ambient temperatures below 0°C (32°F)]
- Radiator Core Guard

### Decision-Maker™ 1000 Controller

- Alarm Horn
- Analog Indicator
- Differential Protection with Time and Sensitivity Adjustment
- Differential Triggering Fault
- External ATS Position
- External Starting Order
- Line Voltages, Volts Indicator
- Overload or Short-Circuit Fault
- Permanent Insulation Controller
- Phase Currents, Amps Indicator
- Plug Preheating
- Plug Preheating Control
- Remote Start Capability
- Single Voltages, Volts Indicator
- Utility Sensing, 3-Phase
- Water Preheating Control

### Decision-Maker™ 4000 Controller

- Alternator Protection
- Audible Alarm Module
- Five Expandable Modules with Four Inputs/Six Outputs Each
- Network Modules (RTC and GSM modems and ethernet router)
- NFPA-110 Module
- Remote Annunciator
- Voltage/Speed Adjustment Module
- WinTelys Software

### Fuel System

- Automatic Fuel Tank Fill Kit
- Subbase Fuel Tank with Secondary Containment Basin
- Subbase Fuel Tank Leak Alarm
- Water Separator Fuel Filter

### Electrical System

- Battery Charger, Equalize/Float Type
- Battery Isolator Switch

### Engine and Alternator


- Alternator Strip Heater
- Air Cleaner, Heavy Duty (with air restriction indicator)
- Droop Kit with 3-Function Voltage Regulator
- Lube Oil Drain Pump
- PMG Alternator and Voltage Regulator
- Tropical Heavy-Duty Alternator Insulation

### Miscellaneous Accessories

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_


## Dimensions and Weights

### Open Model

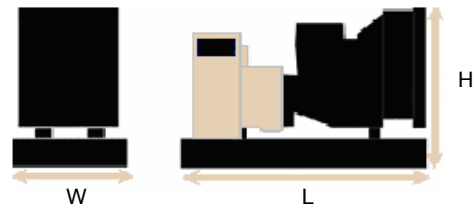

Overall Size, L x W x H, mm (in.): 2900 x 1300 x 1697 (114 x 51 x 67)  
 Weight, wet, kg (lb.):  
 60 Hz 2350 (5181)  
 50 Hz 2635 (5808)

### With Available Enclosure Accessory

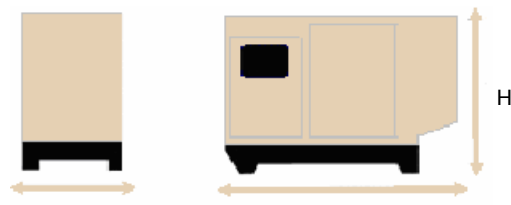

Overall Size, L x W x H, mm (in.): 4004 x 1380 x 2145 (158 x 54 x 84)  
 Weight, wet, kg (lb.):  
 60 Hz 3300 (7275)  
 50 Hz 3625 (7990)

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

**DISTRIBUTED BY:**